


## ▶ TABLE OF STANDARD PROPERTIES OF USE AND MEASUREMENT

The properties defined in the table below, are set up according to the technical conditions of use and measurement. These properties are warranted within their variation range and in compliance with the standard technical conditions of use.

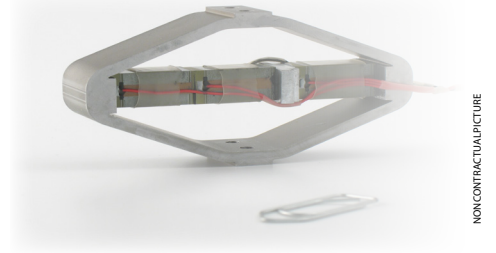

NON-CONTRACTUAL PICTURE

PROPERTIES	STANDARD TECHNICAL CONDITIONS	UNIT	NOMINAL VALUES	MIN. VALUES	MAX. VALUES
Notes		-	-	-	-
Max. no load displacement	Quasistatic excitation, blocked-free	μm	129	103	152
Blocked force	Quasistatic excitation, blocked-free	N	1400.0	1120.0	1680.0
Stiffness	Quasistatic excitation, blocked-free	N/μm	10.843	8.674	11.93
Resonance frequency (free-free)	Harmonic excitation, free-free, on the admittance curve	Hz	5681	4829	6249
Response time (free-free)		ms	0.09	0.08	0.10
Resonance frequency (blocked-free)	Harmonic excitation, blocked-free, on the admittance curve	Hz	1750	1488	1925
Response time (blocked-free)		ms	0.29	0.26	0.33
Capacitance	Quasistatic excitation, free-free, on the admittance curve	μF	20.00	18.00	26.00
Max. no load displacement at resonance	Max. harmonic excitation, free-free	μm p-p	116	93	139
Max. voltage at resonance	Max. harmonic excitation, free-free	V <sub>rms</sub>	9.00	7.20	10.80
Force limit (0-pk)	Max. harmonic excitation, free-free	N	700.00	560.00	770.00
Resolution	Quasistatic excitation	nm	1	-	-
Height (in actuation direction)		mm	45.00	44.90	45.10
Length		mm	78.90	78.80	79.00
Width (excl. wedge & wires)		mm	20.00	19.95	20.05
Width (incl. wedge & wires)		mm	22.50	21.50	24.00
Mass		g	160.0	-	-
Standard mechanical interface	2 flat surfaces 9*20 mm <sup>2</sup> with 2 Ø 3.2 mm holes, centred at 5 mm from the side	-	-	-	-
Standard electrical interface	2 PTFE insulated AWG26 wires 300 mm long with Ø 1 banana plug	-	-	-	-

## ▶ PROPERTIES STANDARD TECHNICAL CONDITIONS OF USE AND MEASUREMENT

Free-free :	The actuator is not fixed
Blocked-free :	The actuator is fixed to a mechanical support assumed infinitely stiff
Quasistatic excitation :	AC voltage between -20 and 150 V at 1 Hz
Harmonic excitation :	Voltage of 0.5 V <sub>rms</sub> , sinusoidal mode from 0 to 100 kHz
Max. harmonic excitation :	Voltage defined by the measurement of max. displacement, sinus at resonance frequency
Displacement measurement :	Laser interferometer, capacitive displacement sensor
Admittance measurement :	HP 4194 A or Cypher C60 electrical impedance analyser
Environment :	Ambient temperature (15-25°C) and dry air (Humidity < 50 % rH)

Any technical conditions of use, different from those defined above, can lead to temporary or definitive alterations of properties. Thank you to contact CEDRAT TECHNOLOGIES before using actuators under non standard technical conditions.

## ▶ FACTORY TESTS CARRIED OUT

- Test 1 : Electrical admittance vs. Frequency, free-free
- Test 2 : Displacement vs. input voltage

## ▶ EXTRA FACTORY TESTS

- Test 3 : Gain and linearity of the sensor
- Test 4 : Step response in closed loop
- Test 5 : Stability in closed loop


## ▶ MECHANICAL INTERFACE

- |  |  |   |
|--|--|---|
| <input checked="" type="checkbox"/> [ F ] Flat Interface | <input checked="" type="checkbox"/> [ H ] Flat Interface with hole | <input type="checkbox"/> [ TH ] Flat Interface with threaded hole |
| <input type="checkbox"/> [ SV ] Specific version         | <input type="checkbox"/> [ FF ] Free-free Interface                | <input checked="" type="checkbox"/> [ SI ] Specific interface     |

## ▶ AVAILABLE OPTIONS

- |   |   |
|---|---|
| <input type="checkbox"/> [ SG ] Strain gauges           | <input type="checkbox"/> [ ECS ] Eddy current displacement sensor |
| <input checked="" type="checkbox"/> [ NM ] Non-magnetic | <input checked="" type="checkbox"/> [ VAC ] Vacuum                |

➤ 2D CONFIGURATION

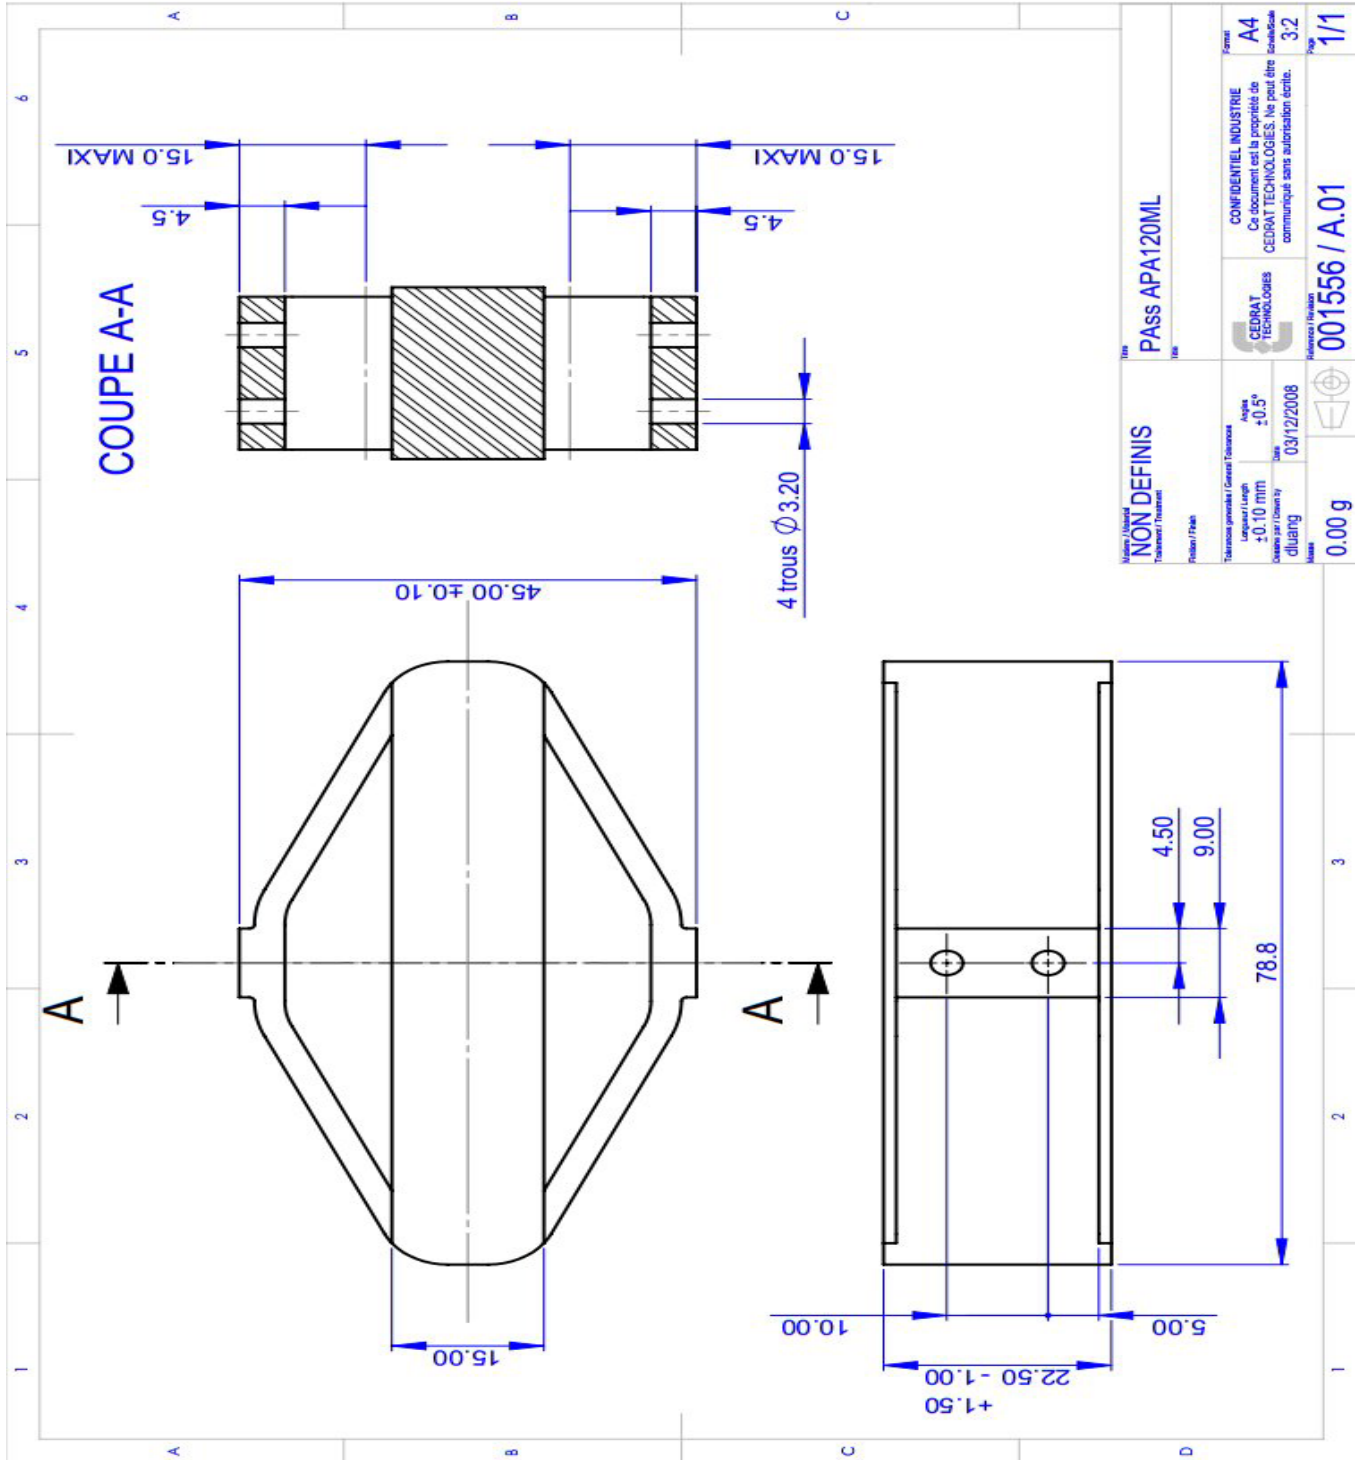

<b>NON DEFINIS</b> Treatment / Traitement		<b>PASS APA120ML</b>	
Finition / Finish		Finition / Finish	
Tolérances générales / General Tolerances		Tolérances / Tolerances	
Longueur / Length +0.10 mm		Angle ±0.5°	
Diamètre per / Diameter by disting		Date 03/12/2008	
Masse / Mass 0.00 g		Référence / Reference 001556 / A.01	
Format A4		Format 3.2	
Ce document est la propriété de CEDRAT TECHNOLOGIES. Ne peut être communiqué sans autorisation écrite.		Page 1/1	