


NAC2402-H2.3

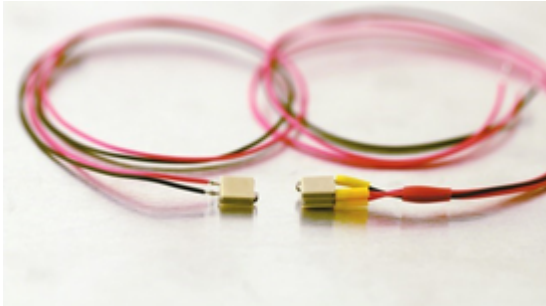

The Noliac shear stack NAC2402-H2.3 features shear motion on the X-axis. NAC2402-H2.3 measures 5x5 mm with a height of 2.3 mm and provides a free stroke of 3 μ m and a capacitance of 1.7 nF.

SPECIFICATIONS

Attributes	Value	Tolerance
Chamfers	X 0,00	
Length / outer diameter	5 mm	+/-0.20 mm
Width / inner diameter	5 mm	+/-0.20 mm
Height	2.3 mm	+/-0.05 mm
Operating voltage, max.	\pm 320 V	
Free stroke, from -Vmax to +Vmax	3 μ m	+/- 20%
Capacitance	1.7 nF	+/- 20%
Maximum operating temperature	150 °C	
Material	NCE51	
Unloaded resonance frequency	700 Hz	


DRAWINGS

Multi-axis piezoelectric shear actuator stacks

Standard features

- X and X/Y motions
- Smart design
- -320 V to +320 V maximum operating voltage for all motions
- Ideal for all stick and slip and nanopositioning applications
- Top and bottom isolations included
- Non-magnetic ultra-thin electrodes

The informative here opposite drawing is for a 2 shear plate configuration of X-motion. See the table below for other standard offers.

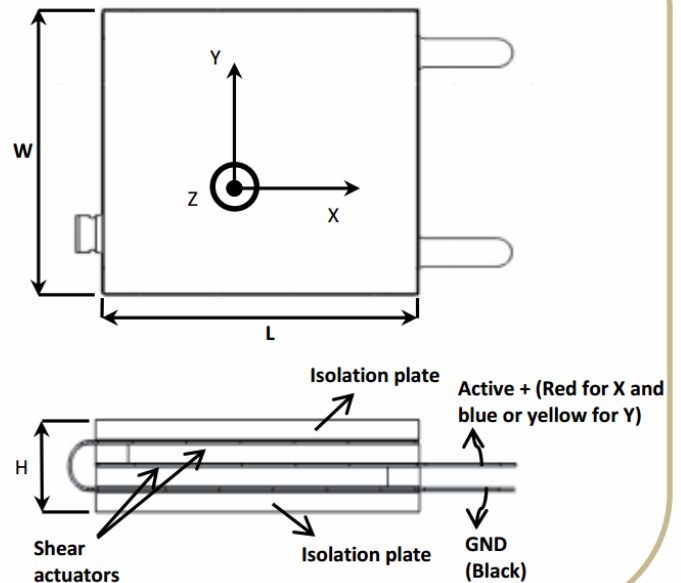

WIRES

As a standard the shear stacks are fitted with these wires:

- 28 AWG PTFE Insulated Wires (red for X-motion and blue or yellow for Y-motion).



Your piezo partner

The types and colours of the wires can be changed on demand.